

Broome Wharf Information



Soundings current at
Aug 2024 - REC94670

- L Vertical Ladder
- L Multi- Staged Landings
- F Fuel (80 tonnes/hr)
- f Bowser (14 tonnes/hr)
- W Water (100mm 100 tonnes/l)
- w Water (50mm & 25mm 14 tonnes/hr)
- + Emergency Shower
- + First Aid
- MUSTER POINT Muster Point
- ♿ Toilet
- Original Wharf load limits 3.4
- Wharf extension load limits 4.5
- Max wheel loads as per highway regulation
- SWL Bollards 50t
- SWL 70T Bollard
- SWL 35T Bollard d/t Pilings


Tides

Highest Astronomical Tide	10.60m
Mean High Water Springs	9.33m
Mean High Water Neaps	6.37m
Mean Low Water Neaps	4.56m
Mean Low Water Springs	1.60m
Lowest Astronomical Tide	0.13m


Berth Lengths

Outer Berth (4-6)	331m
Original Wharf Inner Berths (1-3)	175m
Wharf Extension Inner Berths (11)	104m

Neck light height: 9m
Jetty Gate Width: 6.9m

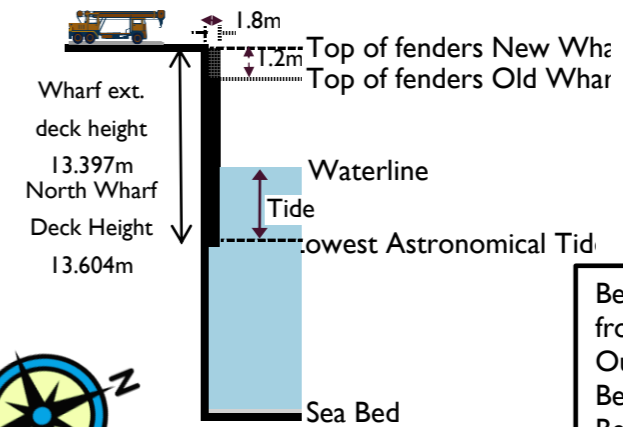

Berth pockets extend from the fender line.
Outer Berth - 40m
Berths 2 & 3 - 22m
Berth 1 - 12m
Berth 11 - 20m

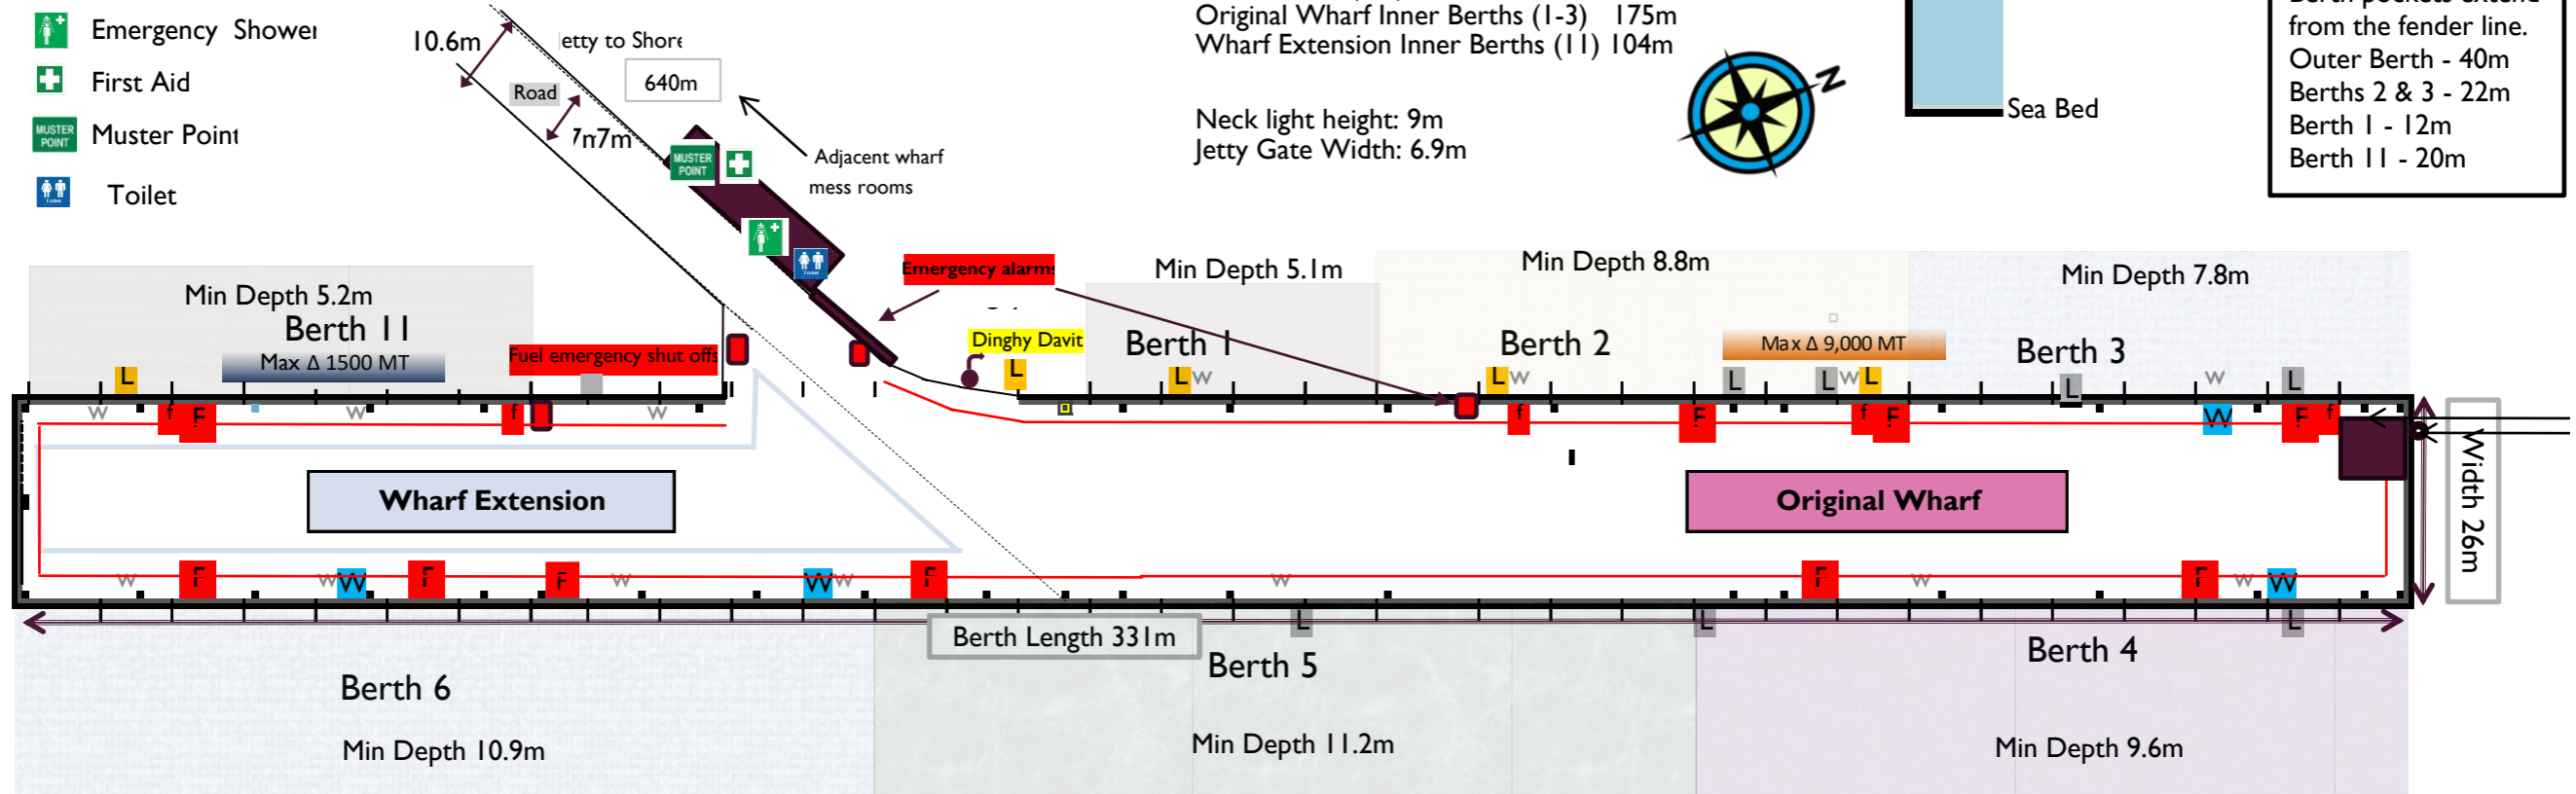

Max Draught 9.1m (Deeper draughts may be accommodated depending on tides)

Maximum Berthing Δ 50,000 MT
Larger vessels with permission

Disclaimer

All descriptions, dimensions and references to conditions and other details contained in this diagram are given in good faith and are believed to be true and correct, however they are provided as a guide only and should not be relied upon as representation of fact. Interested parties must satisfy themselves as to the accuracy of details by way of inspection or otherwise.

Copyright

This diagram including but not limited to all logos, graphics and text remains the property of Kimberley Ports Authority and must not be copied, modified, altered, amended or transferred without the express written permission of Kimberley Ports Authority.